



产品介绍
INTRODUCTION



CW6C-*A-R



CW12C-(40~60)A-S



CW12C-(3~30)A-R



CW12C-(3~30)A-S(005)



CW12C-(3~30)A-S



CW12C-(40~60)A-R



CW12C-(40~60)A-S(005)

- 三相四线交流电源滤波器 Three-phase four-wire AC power filter
- 含共模线圈 With common mode coil
- 多种出线方式可供选择 Multiple connection to choose from
- 多种安装方式可供选择 Multiple installation methods to choose from

产品特点
FEATURE

- CW12C-*A-S** 螺丝固定螺栓出线滤波器 Screw bolt connection filter by screw fixed
- CW12C-(3~30)A-R** 侧面导轨固定端子排出线滤波器 Terminal block connection filter by side guide rail fixed
- CW12C-(3~30)A-S(005)** 螺丝固定端子排出线滤波器 Terminal block connection filter by screw fixed
- CW12C-(40~60)A-R** 侧面导轨欧式端子出线滤波器 European style terminal block connection filter by side guide rail fixed
- CW12C-(40~60)A-S(005)** 螺丝固定欧式端子出线滤波器 European style terminal block connection filter by screw fixed
- CW6C-*A-R** 螺丝固定端子排出线滤波器 Terminal block connection filter by screw fixed

应用范围
APPLICATION

- 电子电气设备 Electrical and Electronic Equipment
- 医疗设备 Medical Equipment
- 办公自动化设备 Office Automation Equipment
- 消费电子 Consumer Electronic Production
- 数据通讯设备 Data Communication
- 变频器 Frequency converter
- 机械设备 Mechanical equipment
- 三相工业设备 Three-phase industrial equipment
- 各类电力设备 Power equipment of all kinds equipment


技术参数
TECHNICAL DATA

- 额定电压 / Rated Voltage: 115/250/380/440V AC
- 工作频率 / Working Frequency: 50/60Hz
- 额定电流 / Rated Current: 1-80A
- 气候类型 / Climatic Category: 25/85/21
- 测试电压 / Working Frequency: 1500V DC(Line to Line) 2000V AC(Line to Ground)

产品列表
LIST

产品型号 Part No.	额定电流(A) Rate Current	泄露电流(mA) Leakage Current @250VAC 50Hz	电路图 Schematics	外形尺寸 Dimension	出线方式 Connection	安装方式 Installation	重量 (g) Weigh	安规认证 Certification
CW12C-*S	3/6/10/20/30	<2.1	B11	A22		螺丝 Screw	859	CE RoHS CQC 94
CW12C-*S	40/50/60	<2.1	B11	A58		螺丝 Screw	879	RoHS CE
CW12C-*A-S(005)	3/6/10/20/30	<2.1	B24	A49		螺丝 Screw	827	CE RoHS CQC 94
CW12C-*A-R	3/6/10/20/30	<2.1	B24	A50		导轨 Rail	830	CE RoHS CQC 94
CW6C-*A-R	40/50/60/70/80	<2.1	B24	A43		螺丝 Screw	2170	RoHS CE
CW12C-*A-S(005)	40/50/60	<2.1	B24	A55		螺丝 Screw	856	RoHS CE
CW12C-*A-R	40/50/60	<2.1	B24	A56		导轨 Rail	860	RoHS CE


外形尺寸(mm)
DIMENSION

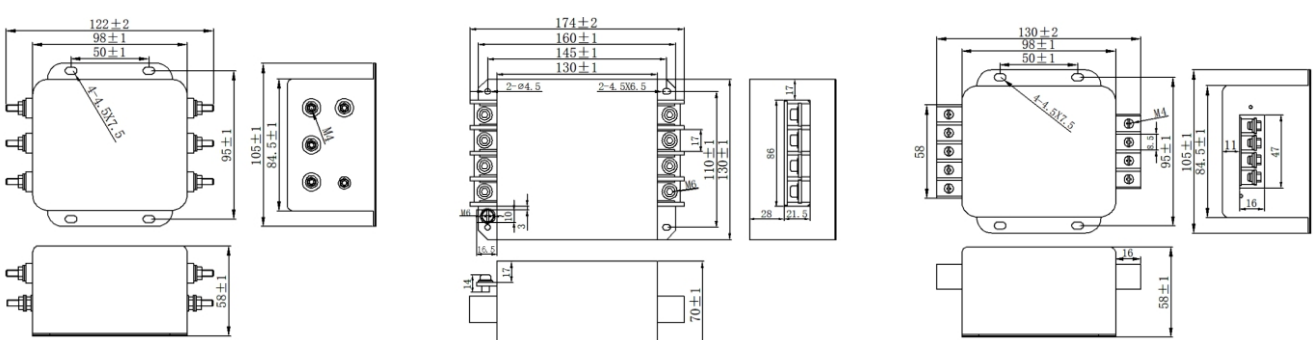

A22


A43

A49

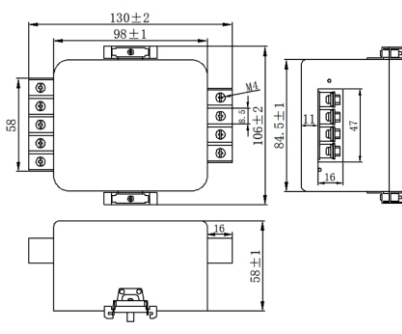

A50


A55

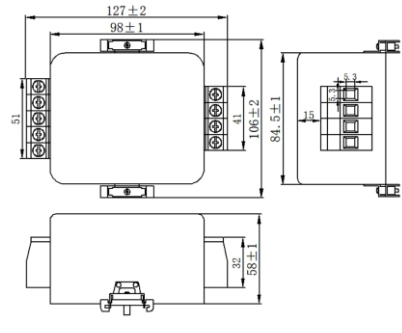


A56

A58

电路图
SCHEMATICS

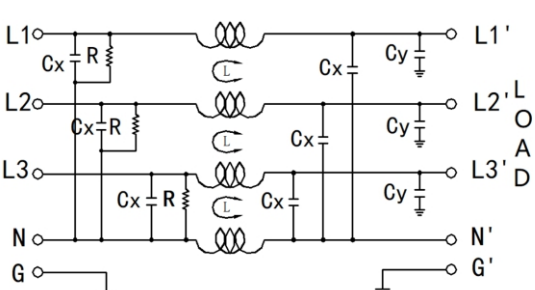

B11

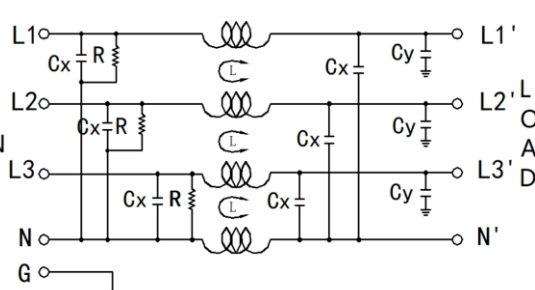

B24