

产品介绍
INTRODUCTION



CW6BL2-(3~30)A-R



CW6BL2-(40~85)A-R



CW6BL3-*A-R



YS74M2BR-*A

- 三相交流电源滤波器 Three-phase AC filters
- 多种出线方式可供选择 Multiple connection to choose from
- 含共模和差模线圈 With common mode and differential mode coil
- 多种极数可供选择 Multiple pole to choose from

产品特点
FEATURE

- CW6BL2-(3~30)A-R 端子排出线双极滤波器 Terminal block connection bipolar filter
- CW6BL2-(40~85)A-R 欧式端子出线双极滤波器 European style terminal block connection bipolar filter
- CW6BL3-*A-R 端子排出线三极滤波器 Terminal block connection three pole filter
- YS74M2BR-*A 端子台出线大电流双极滤波器 Terminal outlet high current bipolar filter

应用范围
APPLICATION

- 电子电气设备 Electrical and Electronic Equipment
- 消费电子 Consumer Electronic Production
- 机械设备 Mechanical equipment
- 医疗设备 Medical Equipment
- 数据通讯设备 Data Communication
- 三相工业设备 Three-phase industrial equipment
- 办公自动化设备 Office Automation Equipment
- 变频器 Frequency converter
- 各类电力设备 Power equipment of all kinds


技术参数
TECHNICAL DATA

- 额定电压 /Rated Voltage : 115/250/380/480V AC
- 额定电流 /Rated Current : 3-200A
- 测试电压 /Working Frequency : 1500V DC(Line to Line) 2000V AC(Line to Ground)
- 工作频率 /Working Frequency : 50/60Hz
- 气候类型 /Climatic Category : 25/85/21


产品列表
LIST

产品型号 Part No.	额定电流(A) Rate Current	泄露电流(mA) Leakage Current @250VAC 50Hz	电路图 Schematics	外形尺寸 Dimension	出线方式 Connection	安装方式 Installation	重量 (g) Weigh	安规认证 Certification
CW6BL3-*A-R	3/6/10/20/30	<2.1	B19	A29		螺丝 Screw	2300	CE RoHS
CW6BL2-*A-R	3/6/10/20/30	<2.1	B15	A29		螺丝 Screw	2150	CE RoHS
YS74M2BR-*A	90 ~ 200	<2.1	B34	A41		螺丝 Screw	4100	CE RoHS
CW6BL2-*A-R	40/50/60/70/ 80/85	<2.1	B15	A30		螺丝 Screw	3200	CE RoHS

外形尺寸(mm)
DIMENSION

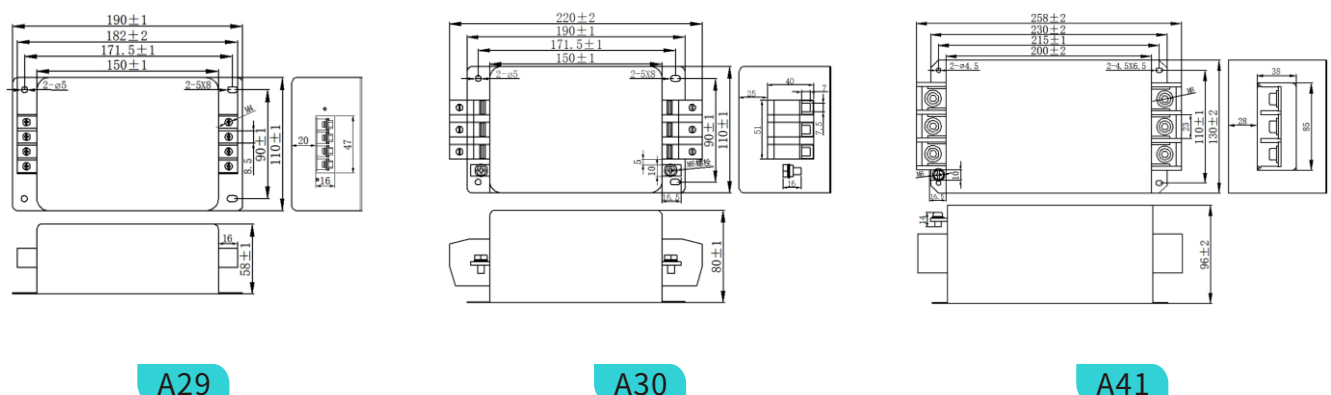

电路图
SCHEMATICS

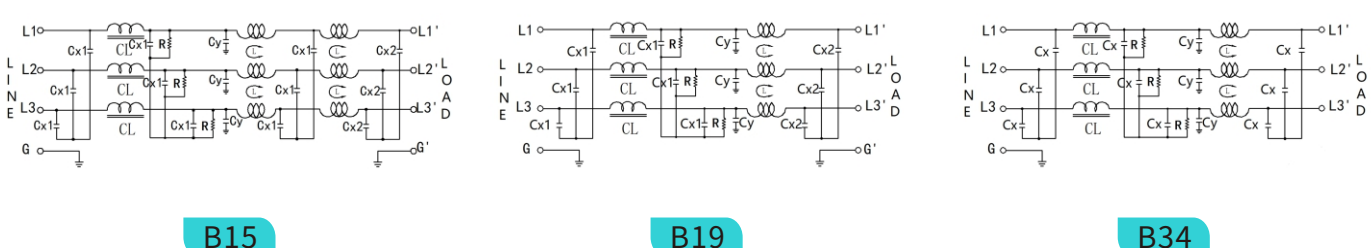

专业电源滤波器制造商
Professional power filters from manufacturer