

产品介绍



YS76M3GB- * A

- 三相交流输出型电源滤波器
Three-phase AC output filters
- 主要用于变频器输出端
Mainly used for the output terminal of frequency converters
- 含共模和差模线圈
With common mode coil and differential mode coil
- 3A-80A多种电流可选
3A-80A Multiple Current Options
- 可按照客户要求定制输出型滤波器
The output filter can be customized according to customer's requirements

产品特点 FEATURE

- **YS76M3GR- *A** 小电流三极输出型滤波器
 Low current three pole output filter

 YS91M2GR- *A 大电流双极输出型滤波器
 High current bipolar output filter

应用范围 APPLICATION

- 变频器
frequency changer/inverter
 - 变频电源
variable-frequency power sources
 - 伺服电机
actuating motor
 - 各类变频原理设备
All kinds of frequency conversion principle equipment

技术参数 TECHNICAL


- | | |
|---|--|
| <p>■ 额定电压/ Rated Voltage: 115/250/380/440V AC</p> | <p>■ 工作频率/ Working Frequency: 50/60Hz</p> |
| <p>■ 额定电流/ Rated Current: 3-80A</p> | <p>■ 气候类型/ Climatic Cztegoty: 25/85/21</p> |
| <p>■ 测试电压/ Working Frequency: 1500VDC (Line to Line) 2000V AC(Line to Ground)</p> | |

产品列表

LIST


产品型号 Part No.	额定电流(A) Rate Current	泄露电流(mA) Leakage Current @250VAC 50Hz	电路图 Schematics	外形尺寸 Dimension	出线方式 Connection	安装方式 Installation	重量(g) Weigh	安规认证 Certification
YS76M3GR- *A 输出型	3/6/10/20/30	<2.1	B28	A29		螺丝 Screw	2200	CE RoHS
YS91M2GR- *A 输出型	40/50/60/70/80	<2.1	B29	A51		螺丝 Screw	2950	CE RoHS

外形尺寸(mm)
DIMENSION

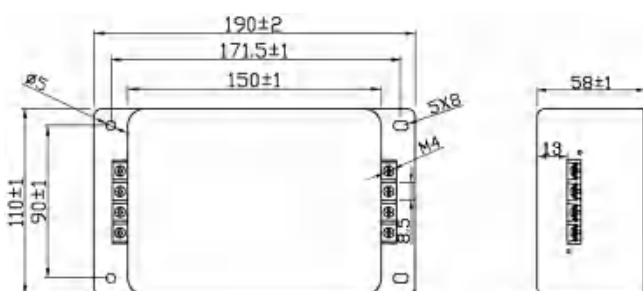

A51

电路图

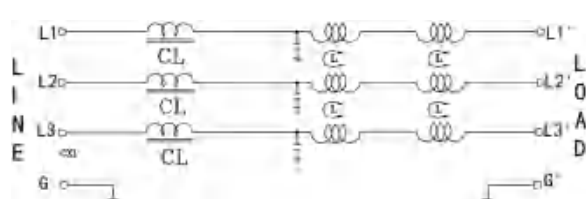

B29

专业电源滤波器制造商
Professional power filters from manufacturer