

产品介绍
INTRODUCTION



CW1D-*A-T



CW2B-*A-T(001)



CW2B-*A-T(002)

■ 单相交流电源滤波器
Single Phase AC Filters

■ 含共模线圈
With common mode coil

■ IEC标准插座式一体滤波器
IEC standard socket type filter

■ 250端子可快速插拔
250 terminals can quick plug



CW2B-*A-T(003)



CW2B-*A-T(004)



CW2B-*A-T



CW4L2-*A-L

产品特点
FEATURE

- CW1D-*A-T 插座型滤波器
Socket filter
- CW2B-*A-T 单保险丝小开关插座型滤波器
Socket filter with 1 fuse and small switch
- CW2B-*A-T(001) 单保险丝插座型滤波器
Socket filter with 1 fuse
- CW2B-*A-T(002) 双保险丝插座型滤波器
Socket filter with 2 fuse
- CW2B-*A-T(003) 单保险丝大开关插座型滤波器
Socket filter with 1 fuse and big switch
- CW2B-*A-T(004) 双保险丝大开关插座型滤波器
Socket filter with 2 fuse and big switch
- CW4L2-*A-L 公母电源线插座型滤波器
Socket filter with plug and power wire

应用范围
APPLICATION

- 插座电子电气设备
Electrical and Electronic Equipment
- 医疗设备
Medical Equipment
- 办公自动化设备
Office Automation Equipment
- 消费电子
Consumer Electronic Production
- 数据通讯设备
Data Communication
- 其他电源产品等
Other Power Production...


技术参数
TECHNICAL DATA

- 额定电压 / Rated Voltage : 115/250V AC
- 工作频率 / Working Frequency : 50/60Hz
- 额定电流 / Rated Current : 1-10A
- 气候类型 / Climatic Category : 25/85/21
- 测试电压 / Working Frequency : 1500V DC(Line to Line) 2000V AC(Line to Ground)


产品列表
LIST

产品型号 Part No.	额定电流(A) Rate Current	泄露电流(mA) Leakage Current @250VAC 50Hz	电路图 Schematics	外形尺寸 Dimension	出线方式 Connection	安装方式 Installation	重量 (g) Weigh	安规认证 Certification
CW1D-*A-T	3/6/10	<0.5	B2	A6		螺丝 Screw	38	RoHS
CW2B-*A-T	3/6/10	<0.5	B5	A8		螺丝 Screw	58	RoHS
CW2B-*A-T 红色开关	3/6/10	<0.5	B5	A8		螺丝 Screw	58	RoHS
CW2B-*A-T(001)	3/6/10	<0.5	B3	A7		螺丝 Screw	45	RoHS
CW2B-*A-T(002)	3/6/10	<0.5	B4	A7		螺丝 Screw	48	RoHS
CW2B-*A-T(003)	3/6/10	<0.5	B5	A9		螺丝 Screw	65	RoHS
CW2B-*A-T(003) 红色开关	3/6/10	<0.5	B5	A9		螺丝 Screw	65	RoHS
CW2B-*A-T(004)	3/6/10	<0.5	B6	A10		螺丝 Screw	68	CE RoHS
CW4L2-*A-L	1/3/6/10	<0.5	B9	A32		螺丝 Screw	360	CE RoHS


外形尺寸(mm)
DIMENSION

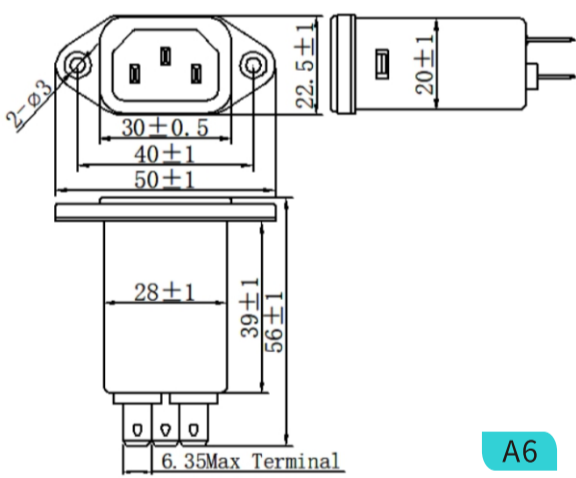


A6

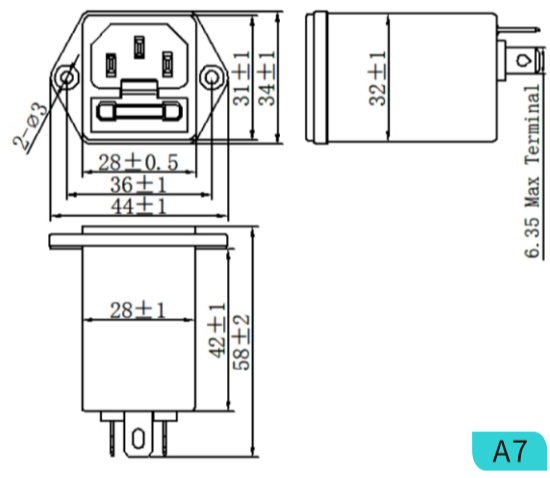


A7

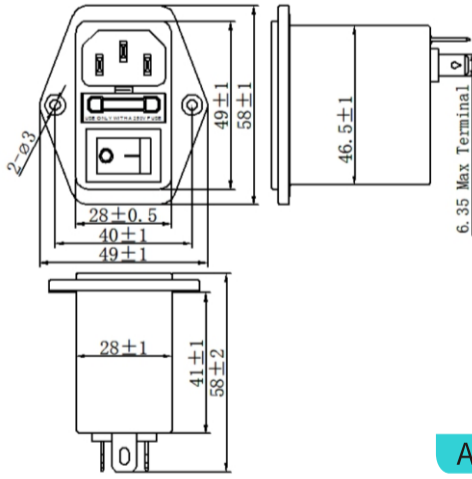


A8

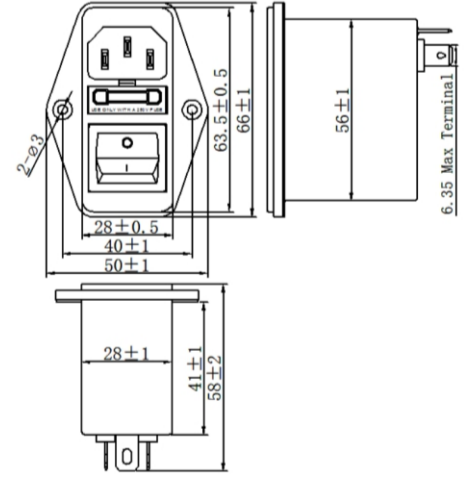

A9

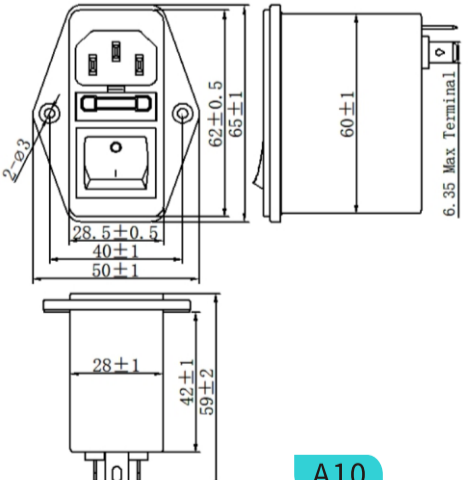


A10

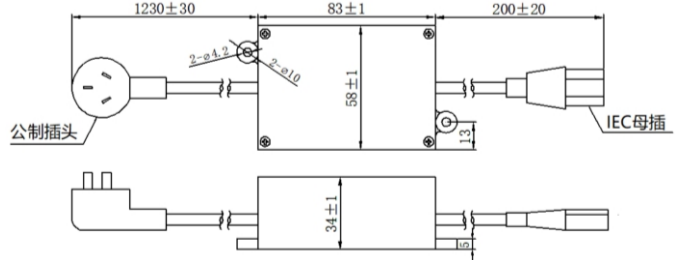


A32


电路图
SCHEMATICS

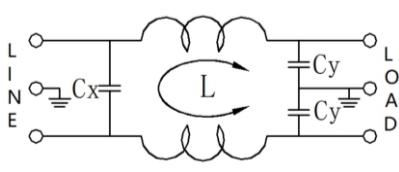


B2

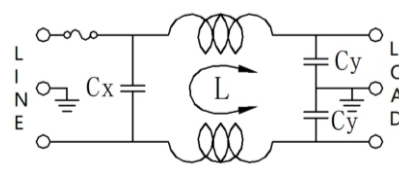


B3

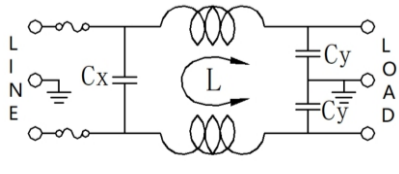


B4

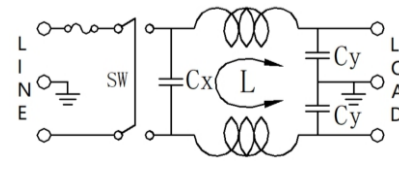

B5

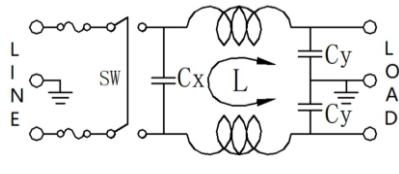

B6

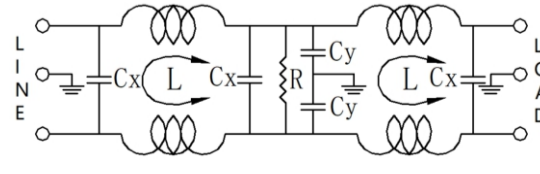

B9

专业电源滤波器制造商
Professional power filters from manufacturer