

产品介绍  
INTRODUCTION



CW3-\*A-S



CW3-\*A-T



CW3L2-\*A-S



CW3L2-\*A-T


- 单相交流电源滤波器  
Single Phase AC Filters
- 含共模线圈  
With common mode coil
- 250端子/螺栓可快速连接  
250 Terminal/screw bolt can quick connect
- 单双极可供选择  
Unipolar and bipolar can be choose



CW4E-\*A-S



CW4E-\*A-T



CW4EL2-\*A-S



CW4EL2-\*A-T

产品特点  
FEATURE

- CW3-\*A-T 插片式单极滤波器  
Unipolar filter with terminal
- CW3-\*A-S 螺栓式单极滤波器  
Unipolar filter with screw bolt
- CW3L2-\*A-T 插片式双极滤波器  
Bipolar filter with terminal
- CW3L2-\*A-S 螺栓式双极滤波器  
Bipolar filter with screw bolt
- CW4E-\*A-T 插片式单极滤波器  
Unipolar filter with terminal
- CW4E-\*A-S 螺栓式单极滤波器  
Unipolar filter with screw bolt
- CW4EL2-\*A-T 插片式双极滤波器  
Bipolar filter with terminal
- CW4EL2-\*A-S 螺栓式双极滤波器  
Bipolar filter with screw bolt

应用范围  
APPLICATION

- 电子电气设备  
Electrical and Electronic Equipment
- 医疗设备  
Medical Equipment
- 办公自动化设备  
Office Automation Equipment
- 消费电子  
Consumer Electronic Production
- 数据通讯设备  
Data Communication
- 其他电源产品等  
Other Power Production...


技术参数  
TECHNICAL DATA

- 额定电压 / Rated Voltage: 115/250V AC
- 工作频率 / Working Frequency: 50/60Hz
- 额定电流 / Rated Current: 1-30A
- 气候类型 / Climatic Category: 25/85/21
- 测试电压 / Working Frequency: 1500V DC(Line to Line) 2000V AC(Line to Ground)


产品列表  
LIST

产品型号 Part No.	额定电流(A) Rate Current	泄露电流(mA) Leakage Current @250VAC 50Hz	电路图 Schematics	外形尺寸 Dimension	出线方式 Connection	安装方式 Installation	重量 (g) Weigh	安规认证 Certification
CW3-*A-S	3/6/10/20/30	<0.5	B7	A12		螺丝 Screw	135	RoHS CE
CW3L2-*A-S	3/6/10	<0.5	B8	A12		螺丝 Screw	134	RoHS CE
CW3-*A-T	3/6/10/20	<0.5	B7	A11		螺丝 Screw	120	RoHS CE
CW3L2-*A-T	3/6/10	<0.5	B8	A11		螺丝 Screw	119	RoHS CE
CW4E-*A-S	3/6/10/20/30	<0.5	B7	A16		螺丝 Screw	219	RoHS CE
CW4EL2-*A-S	3/6/10/20/30	<0.5	B8	A16		螺丝 Screw	265	RoHS CE
CW4E-*A-T	3/6/10/20	<0.5	B7	A15		螺丝 Screw	202	RoHS CE
CW4EL2-*A-T	3/6/10/20	<0.5	B8	A15		螺丝 Screw	225	RoHS CE


外形尺寸(mm)  
DIMENSION

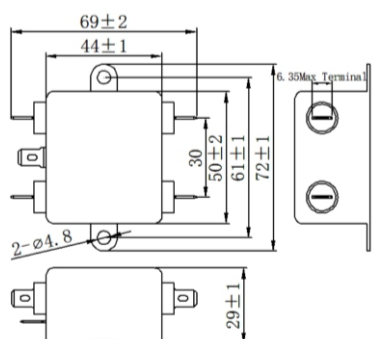


A11

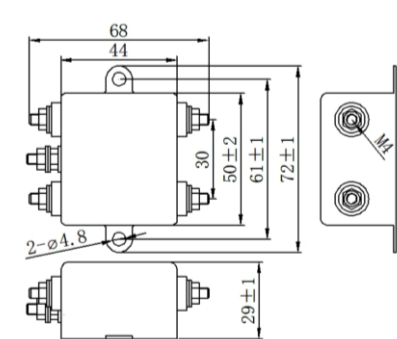

A12

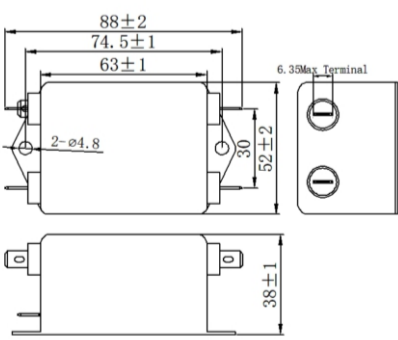


A15

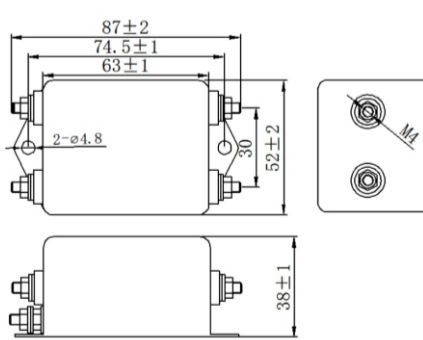


A16

电路图  
SCHEMATICS

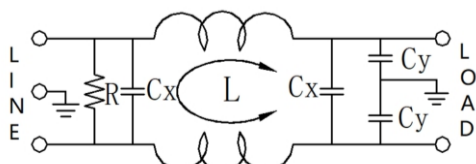

B7

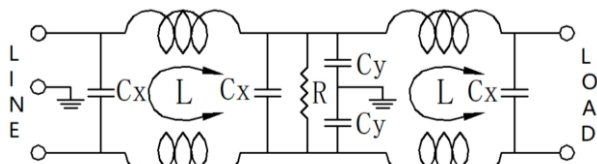

B8

专业电源滤波器制造商

Professional power filters from manufacturer