

产品介绍 — INTRODUCTION



CW7B-*A-B

- | | |
|--|----------------------------------|
| ■ 三相交流电源滤波器
Three-phase AC filters | ■ 含共模线圈
With common mode coil |
| ■ 多种出线方式可供选择
Multiple connection to choose from | ■ 大电流滤波器
High current filter |

产品特点 FEATURE

- | | |
|---|---|
|  CW6B- * A-S 螺丝固定螺栓出线滤波器
Screw bolt connection filter by screw fixed |  CW7B- *A-R 螺丝固定端子排出线滤波器
Terminal block connection filter by screw fixed |
|  CW6B- * A-R 螺丝固定欧式端子出线滤波器
European style terminal block filter by screw fixed |  CW8BL2- * A-S 螺丝固定螺栓出线滤波器
Screw bolt connection filter by screw fixed |

应用范围 — APPLICATION

- | | | |
|---|---|--|
| ■ 电子电气设备
Electrical and Electronic Equipment | ■ 医疗设备
Medical Equipment | ■ 办公自动化设备
Office Automation Equipment |
| ■ 消费电子
Consumer Electronic Production | ■ 数据通讯设备
Data Communication | ■ 变频器
Frequency converter |
| ■ 机械设备
Mechanical equipment | ■ 三相工业设备
Three-phase industrial
euiptment | ■ 各类电力设备
Power equipment of all kinds |

技术参数 — TECHNICAL DATA


- | | |
|--|---------------------------------------|
| ■ 额定电压 / Rated Voltage : 115/250/380/440V AC | ■ 工作频率 / Working Frequency : 50/60Hz |
| ■ 额定电流 / Rated Current : 1-500A | ■ 气候类型 / Climatic Category : 25/85/21 |
| ■ 测试电压 / Working Frequency : 1500V DC(Line to Line) 2000V AC(Line to Ground) | |

产品列表


LIST

产品型号 Part No.	额定电流(A) Rate Current	泄露电流(mA) Leakage Current @250VAC 50Hz	电路图 Schematics	外形尺寸 Dimension	出线方式 Connection	安装方式 Installation	重量(g) Weigh	安规认证 Certification
CW6B- * A-S	40-100	<2.1	B10	A26		螺丝 Screw	2600	CE RoHS
CW6B- * A-R	40-85	<2.1	B10	A30		螺丝 Screw	2500	CE RoHS
CW6B- * A-R	90-115	<2.1	B10	A27		螺丝 Screw	2700	CE RoHS
CW7B- * A-R	120-240	<2.1	B12	A41		螺丝 Screw	4100	CE RoHS
CW8BL2- * A-S	250-500	<2.1	B25	A44		螺丝 Screw	8700	CE RoHS


外形尺寸(mm)
DIMENSION

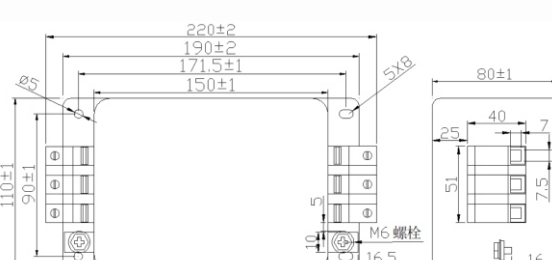

A30

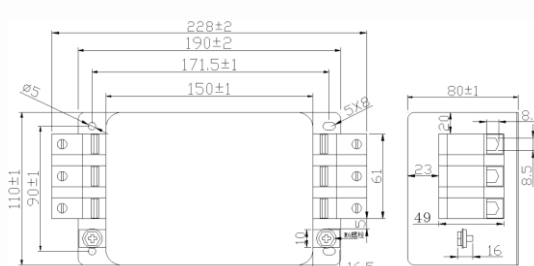


A41

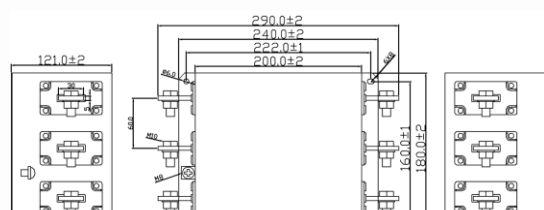

444

电路图 —
SCHEMATICS



P10