


产品介绍


INTRODUCTION



CW12C-•A-S

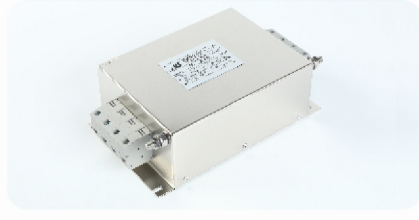


CW6CL2-(40-85)A-R

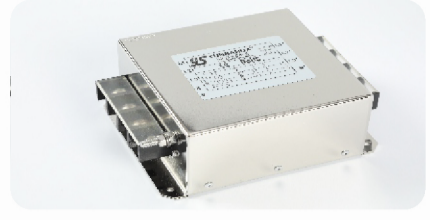


CW6C-•A-R



CW6CL2-(3-30)A-R

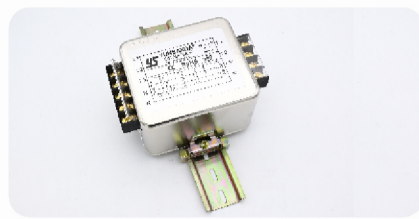

CW12C-•A-R

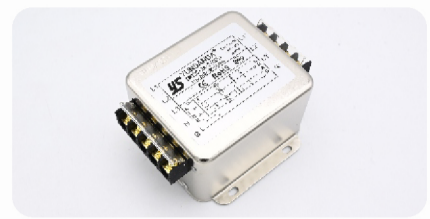

CW12C-•A-S(005)

- 三相四线交流电源滤波器 Three-phase four-wire AC power filter
- 多种出线方式可供选择 Multiple connection to choose from
- 含共模和差模线圈 With common mode and differential mode coil
- 多种安装方式可供选择 Multiple installation methods to choose from

产品特点

FEATURE

- CW12C-•A-S 螺丝固定螺栓出线滤波器 Screw bolt connection filter by screw fixed
- CW12C-•A-S(005) 螺丝固定端子排出线滤波器 Terminal block connection filter by screw fixed
- CW6CL2-(3-85)A-R 螺丝固定欧式端子出线双极滤波器 European style terminal block connection bipolar filter by screw fixed
- CW12C-•A-R 侧面导轨固定端子排出线滤波器 Terminal block connection filter by side guide rail fixed
- CW6C-•A-R 螺丝固定端子排出线滤波器 Terminal block connection filter by screw fixed

应用范围

APPLICATION

- 电子电气设备 Electrical and Electronic Equipment
- 医疗设备 Medical Equipment
- 办公自动化设备 Office Automation Equipment
- 消费电子 Consumer Electronic Production
- 数据通讯设备 Data Communication
- 变频器 Frequency converter
- 机械设备 Mechanical equipment
- 三相工业设备 Three-phase industrial equipment
- 各类电力设备 Power equipment of all kinds equipment

技术参数

TECHNICAL DATA

- 额定电压 /Rated Voltage: 115/250/380/440V AC
- 工作频率 /Working Frequency: 50/60Hz
- 额定电流 /Rated Current: 1-85A
- 气候类型 /Climatic Category: 25/85/21
- 测试电压 /Working Frequency: 1500V DC(Line to Line) 2000V AC(Line to Ground)


产品列表

LIST


产品型号 Part No.	额定电流(A) Rate Current	泄露电流(mA) Leakage Current @250VAC 50Hz	电路图 Schematics	外形尺寸 Dimension	出线方式 Connection	安装方式 Installation	重量(g) Weigh	安规认证 Certification
CW12C-•A-S	3~60	<2.1	B11	A22		螺丝 Screw	970	CE RoHS CS
CW12C-•A-S(005)	3/6/10/20/30	<2.1	B24	A49		螺丝 Screw	832	CE RoHS CS
CW12C-•A-R	3/6/10/20/30	<2.1	B24	A50		导轨 Rail	835	CE RoHS CS
CW6C-•A-R	40/50/60/70/80	<2.1	B24	A43		螺丝 Screw	2170	RoHS CE
CW6CL2-•A-R	3/6/10/20/30	<2.1	B18	A34		螺丝 Screw	2200	RoHS CE
CW6CL2-•A-R	40-85	<2.1	B18	A35		螺丝 Screw	4550	RoHS CE

外形尺寸(mm)


DIMENSION

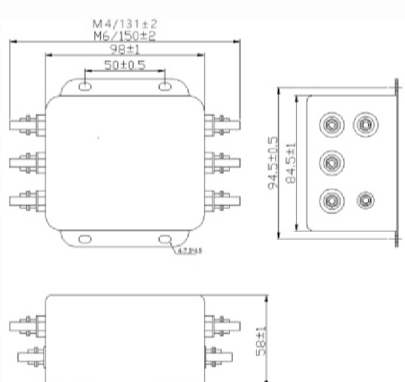


A22

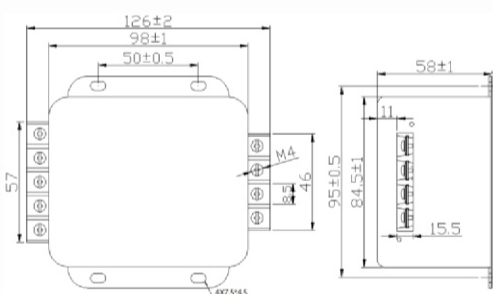


A49

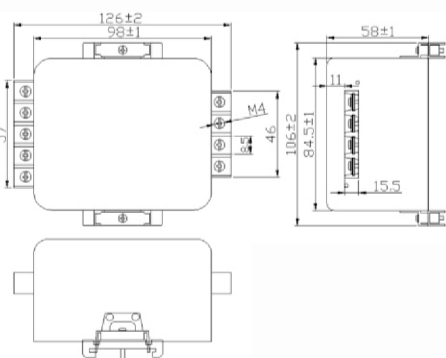


A50

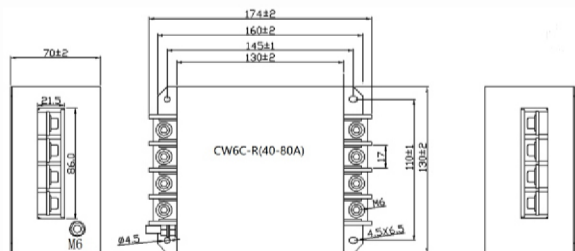

A43

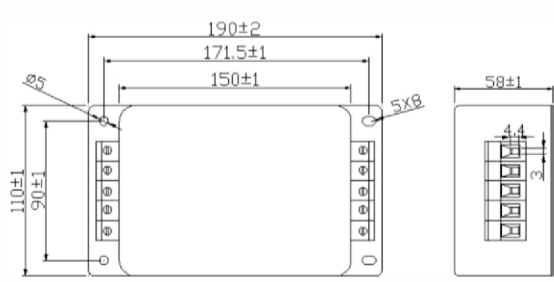


A34

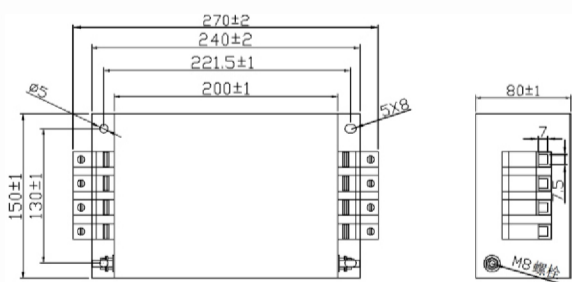


A35

电路图


SCHEMATICS

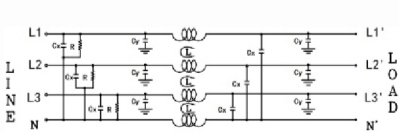

B24

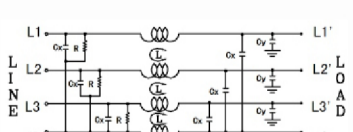

B11



B18